



# Variant Paint System

## Description and uses

The Acrylicon Variant Paint System is a thin coating system. It consists of the same primer and sealer as our Variant System with a paint coat of colour as the body. This gives a hard wearing seal coat for the concrete that provides dust proofing, waterproofing, chemical protection and good aesthetics.

Designed for sealing and colouring concrete, for example light engineering, car parks, plant rooms and other areas where a resin coating is required.

## Specification

Product	Acrylicon Variant Paint System - Preparatory work and application in accordance with suppliers instructions.
Finish	Satin
Thickness	0.5 - 1.2 mm
Slip Resistance	For added slip resistance our Variant Paint Plus option is available in different grades.
Colour	A wide range of options are available, consult the AcryliCon Solid colour chart for details.
Supplier	AcryliCon Polymers GmbH (Germany)

## Key features and benefits



Hard wearing - Excellent resistance to abrasion and fire.



1-2 hours cure time - rapid installation and minimum downtime.



Decorative finish - great aesthetics, UV stable and available in a wide range of colours.



Low emissions - our products are solvent-free and contain very low VOC's.




Chemical bond/cure - a truly seamless floor with no cold joints and virtually no risk of delamination.

To find your nearest AcryliCon office please visit our website:

[www.acrylicon.com](http://www.acrylicon.com)

## System

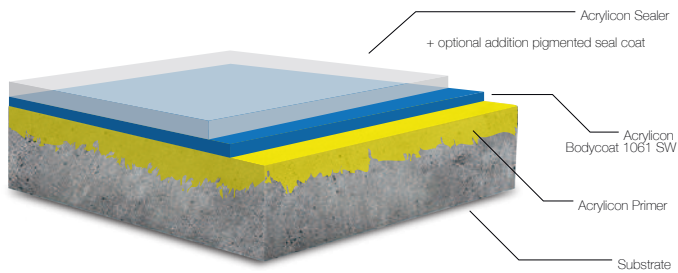

## Technical Information

Compressive Strength  
EN196-1 (DIN1164) 75 N/mm<sup>2</sup> / 10,878 psi

Water Permeability  
DIN / EN 1062-3:2008 <0.001 kg/(m<sup>2</sup>.h0.5)

Tensile Adhesion Strength  
DIN / EN 1542:1999 Concrete: >2.0 MPa

Slip Resistance DIN  
51130 (German  
Ramp Method) Dry R9 - R13 classification

Slip Resistance  
BS 7976 (TRL Pendulum Test) Dry: 88  
Wet: 68

Temperature  
Resistance Tolerant of sustained  
temperatures up to 60°C/140°F

Abrasion Resistance  
EN ISO 5470-1 (Taber) 166 mg (average mass loss)

Shore D  
DIN EN 48-4, ISO 868 85

Chemical Resistance  
EN13529 Good

Fire Class  
EN 13501-1 Efl - s1

The technical properties of the AcryliCon system are evaluated to EN or ISO standards and the results are average values, delivered under proper installation procedures and recommended conditions.

## Cleaning and Maintenance

Clean regularly using a mechanical Scrubber/Dryer. Cylindrical machines with a built in vacuum are best suited in combination with a neutral degreaser. Contact your nearest AcryliCon office for advice.

## Cure Time

The Variant Paint System is fully cured within 2 hours after installation and may be put into full use by the customer.

## Properties and Application

AcryliCon Primer, AcryliCon Bodycoat 1061 SW and AcryliCon Sealer are transparent, solvent-free, medium viscosity and non-toxic when cured. The curing time is about 1 hour at 20°C/68°F (ambient). The lowest application temperature (substrate and material) is 0°C/32°F. AcryliCon can sometimes provide solutions for installations at temperatures down to -25°C/-13F.

## Substrate

The concrete strength must not be less than 22.5N/mm<sup>2</sup> (3250psi). Cores may be required for laboratory testing if any doubt exists. The substrate must be solid, free of dirt, oil, dust and other contaminants that would prevent bonding. It is necessary to protect the substrate from rising moisture and ground water pressure. AcryliCon systems can be applied onto 28 day old concrete at a Relative Humidity of up to 95%. Should there be any doubt about the moisture in the concrete, an insulated hygrometer is recommended for testing the vapour leaving the substrate. In situations requiring rapid installation, AcryliCon can provide fast cure systems as alternatives to traditional concrete. AcryliCon systems can also bond to other substrates. For further advice please contact your nearest AcryliCon office.

## Life Expectancy

7-10 years subject to correct installation conditions and substrate preparation. Life expectancy is generally influenced by the use of the system and the maintenance regime.

## Disclaimer

This information and all further technical advice is based on intensive research and many years experience. However, it implies no liability or other legal responsibility on our part, including with regard to existing third party intellectual property rights, especially patent rights. We reserve the right to make technical alterations during the course of further development. The customer is not released from the obligation of checking our data and recommendations for the suitability of their own particular application. Performance of the product described herein should be verified by testing, which we recommend be carried out only by qualified experts and is the sole responsibility of the customer.



This product has been manufactured under the controls established by an ALL-CERT approved management system that conforms with EN1504-2, ISO 9001:2015 and ISO 14001:2015.

To find your nearest AcryliCon office please visit our website:

[www.acrylicon.com](http://www.acrylicon.com)

 **ACRYLICON**<sup>®</sup>  
Quality Resin Solutions