



Wall System

Description and uses

The Acrylicon Wall System is an extremely hard wearing, hygienic and long lasting wall covering containing decorative flakes or quartz within a chemically bonded resin system. It is easy to apply and coupled with a 2 hour cure time, it can be installed in a fraction of the time when compared to traditional wall cladding and tile systems. Due to Acrylicon's ability to chemically bond it can be fused with Acrylicon Floor Systems to provide a truly monolithic "floor to ceiling" interface.

Designed to be used on walls in changing rooms, showers, toilets, wet rooms, food processing areas, hospitals, pharmaceutical industries, public areas, abattoirs, breweries, bakeries and many other areas requiring a hygienic and easy to clean surface.

Specification

Product	Acrylicon Wall System - Preparatory work and application in accordance with suppliers instructions.
Finish	Satin
Thickness	0.7-1.2 mm
Colour	A wide range of options are available, consult the AcryliCon colour chart for details.
Supplier	AcryliCon Polymers GmbH (Germany).

Key features and benefits



Hard wearing - Excellent resistance to abrasion and fire.



1-2 hours cure time - rapid installation and minimum downtime.



High compressive strength - excellent durability and cleanability.



Low emissions - our products are solvent-free and contain very low VOC's.



Chemical bond/cure - a truly seamless floor with no cold joints and virtually no risk of delamination.



Decorative finish - great aesthetics, UV stable and available in a wide range of colours.




Long lasting - our walls do not degrade or become brittle with use.

To find your nearest AcryliCon office please visit our website:

www.acrylicon.com

System

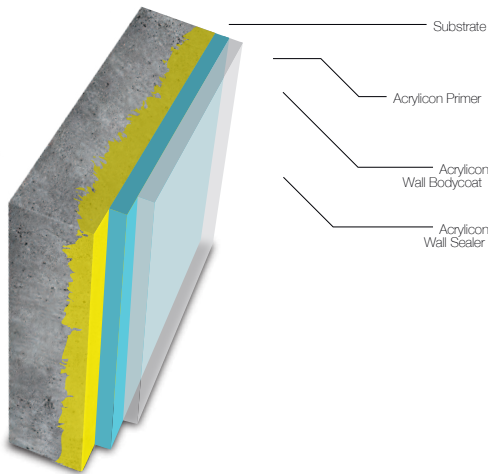

Technical Information

Compressive Strength EN196-1 (DIN1164)	64 N/mm ² / 9,280 psi
Flexural Strength EN 196-1 (DIN1164)	19 N/mm ² / 2,750 psi
Water Permeability DIN / EN 1062-3:2008	<0.001 kg/(m ² .h ^{0.5})
Tensile Adhesion Strength DIN / EN 1542:1999	Concrete: >2.0 MPa
Temperature Resistance	Tolerant of sustained temperatures up to 60°C/140°F
Abrasion Resistance EN ISO 5470-1 (Taber)	166 mg (average mass loss)
Shore D DIN EN 48-4, ISO 868	85
Chemical Resistance EN13529	Excellent

The technical properties of the AcryliCon system are evaluated to EN or ISO standards and the results are average values, delivered under proper installation procedures and recommended conditions.

Cleaning and Maintenance

Can be cleaned in line with current hygiene legislation and best practice. The use of a degreaser is recommended. Due to AcryliCon's unique ability to chemically bond throughout the life of the system, any repairs needed due to customer damage or alterations can be easily achieved.

Cure Time

The AcryliCon Wall System is fully cured within 2 hours after installation and may be put into full use by the customer.

Properties and Application

AcryliCon Wall System resins are transparent, solvent-free, medium viscosity and non-toxic when cured. AcryliCon Wall Bodycoat is a slightly elasticised resin that can be pigmented on site and into which coloured decorative flakes can be fully or partially broadcast. AcryliCon Wall Sealer is used as a colourless protective top coat. The curing time is about 1 hour at 20°C/68°F (ambient). The lowest application temperature (substrate and material) is 0°C/32°F. AcryliCon can sometimes provide solutions for installations down to -25°C / -13°F.

Disclaimer

This information and all further technical advice is based on intensive research and many years experience. However, it implies no liability or other legal responsibility on our part, including with regard to existing third party intellectual property rights, especially patent rights. We reserve the right to make technical alterations during the course of further development. The customer is not released from the obligation of checking our data and recommendations for the suitability of their own particular application. Performance of the product described herein should be verified by testing, which we recommend be carried out only by qualified experts and is the sole responsibility of the customer.

Substrate

The substrate must be solid, free of dirt, oil, dust and other contaminants that would prevent bonding. AcryliCon Wall System can be applied onto the substrate at a Relative Humidity of up to 95%. AcryliCon Wall System can be applied to substrates such as tiles, plaster, concrete and boards (for example Whiterock). For further advice please contact your nearest AcryliCon office.



This product has been manufactured under the controls established by an ALL-CERT approved management system that conforms with EN1504-2, ISO 9001:2015 and ISO 14001:2015.

To find your nearest AcryliCon office please visit our website:

www.acrylicon.com

 **ACRYLICON**[®]
Quality Resin Solutions